


DEEP SCRUB CLEANER

FOR USE WITH VPI ESD & PRT TILE

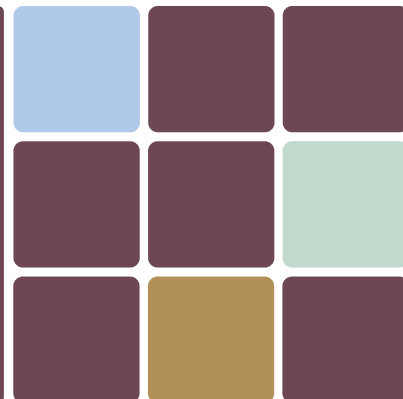

Item O4101GR

DESCRIPTION

Deep Scrub Cleaner is the first step in the overall VPI Flooring Maintenance System. Used in conjunction with the Deep Scrub Pad (maroon in color) it deep cleans, preps, and conditions any new VPI tile floor by thoroughly removing deep down manufacturing residue and ground in installation debris. **Deep scrub cleaning, using VPI Deep Scrub Cleaner, is required before cleaning the surface of the floor.**

Deep Scrub Cleaner meets or exceeds green industry standards for floor care products based on its reduced levels of volatile organic compounds, biodegradability, and low toxicity.

DIRECTIONS FOR USE WITH VPI ESD & PRT TILE

For newly installed VPI tile, sweep or dust mop the floor to remove any large debris. Never use oil base treated dust mops. (See VPI ONGOING CLEANER instructions for how to clean previously installed VPI tile).

Dilute VPI Deep Scrub Cleaner (1 part cleaner: 10 parts water) or 13 oz./gal with cool clean water and apply liberally to the floor. Using the VPI Deep Scrub Pad (maroon in color), agitate floor thoroughly with a low-speed rotary machine or automatic scrubber. Approximately 5 passes are required to properly deep scrub the floor. Make sure floor remains very wet. NOTE: Place a "float pad", such as a standard red pad, underneath the VPI Deep Scrub Pad (maroon in color), before beginning the scrubbing process. This will enhance cleaning.

Pick up the solution with a wet vacuum, automatic scrubber, or a mop and bucket. Rinse with clear water only. Allow floor to dry completely before starting the surface cleaning process using VPI Surface Cleaner in conjunction with VPI Surface Cleaning Pads per VPI's written instructions.

NOTE

It is very important to follow the specific directions for cleaning VPI Tile. Treating it otherwise, can negatively impact visual appearance and electrical performance.
IMPORTANT: Never buff in excess of 375 RPM.

SAFETY

DANGER! CAUSES SEVERE SKIN BURNS AND EYE DAMAGE. Wear protective gloves: > 8 hours (breakthrough time): butyl rubber. Wear eye or face protection: Recommended: splash goggles. Wear protective clothing. Wash hands thoroughly after handling.

FIRST AID: IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Immediately call a POISON CENTER or physician.
IF SWALLOWED: Immediately call a POISON CENTER or physician. Rinse mouth. Do NOT induce vomiting. IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water or shower. Wash contaminated clothing before reuse. Immediately call a POISON CENTER or physician. **IF IN EYES:** Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER or physician. Store locked up. Dispose of contents and container in accordance with all local, regional, national and international regulations.

INGREDIENTS (CAS No.)

Water (7732-18-5), Tripropylene Glycol Methyl Ether (25498-49-1), Benzyl Alcohol (100-07-6), Sodium Xylene Sulfonate (1300-72-7), Monoethanolamine (141-43-5)

No phosphates

SPECIFICATIONS

Color: Clear Pink

pH: 10-11

Residue: None

Biodegradable: Yes

Coverage: 4,000 sq ft per gallon



VPI CORPORATION

3123 South 9th Street, P.O. Box 451, Sheboygan, WI 53082-0451
Phone: 920-458-4664 Fax: 920-458-1368



11MK4212-11/25